




## VIP-2400 E1/ T1 Internet Telephony Trunk Gateway

Với mục đích chức năng hoá sản phẩm, triển khai linh động mà hiệu quả cao trong hệ thống VoIP, PLANET VIP-2400 E1/T1 có cổng trunk được sử dụng đơn giản và đây là một giải pháp mang lại hiệu quả kinh tế cao. Các cổng trunk trong VIP-2000 hỗ trợ truyền gói tin và giao thức báo hiệu như hệ thống điện thoại truyền thống, các cổng đó có khả năng chuyển đổi đường truyền theo giao thức SIP/H.323, các dịch vụ bổ sung thoại giàu tính năng, định tuyến cuộc gọi và hỗ trợ IP QoS tích hợp trong một giải pháp.

PLANET VIP-2100 không chỉ có cổng VoIP trunk mà còn có cổng VoIP vạn năng. VIP-2400 xử lý các cuộc gọi đến giữa H.323, SIP và PSTN, với kỹ thuật định tuyến cuộc gọi thông minh, VIP-2400 có khả năng định tuyến cuộc gọi giữa PBX, PSTN, mạng VoIP để đạt được chất lượng và hiệu quả tốt nhất. Các cổng trunk của VIP-2000 có thể được triển khai trong môi trường không đồng nhất (gồm nhiều thiết bị của nhiều hãng khác nhau), phức tạp như là mạng có các chuẩn và dịch vụ sau: SIP + H.323, SIP+H.323 và PSTN. Hơn thế, VIP-2400 hỗ trợ thoại qua PSTN và VoIP (H.323/SIP) cho các dịch vụ trả trước và dịch vụ trả sau, điều đó tạo ra một dịch vụ rất có lợi đối với các mô hình triển khai nhỏ.

PLANET VIP-2400 không những làm tăng lợi nhuận, tiết kiệm kinh tế mà còn bảo vệ sự đầu tư của bạn vào dịch vụ VoIP.

### >>> Mô hình ứng dụng

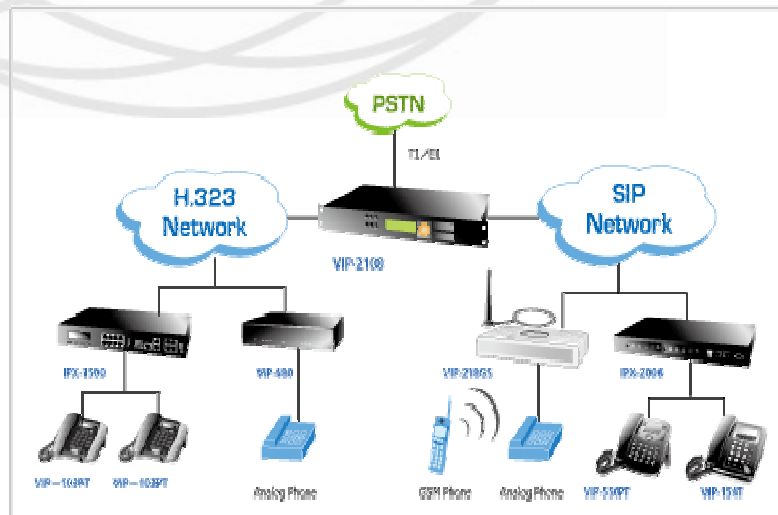

**Đặc tính sản phẩm**

- Tuân theo các chuẩn SIP/H.323, SIP RFC 2543/3261
- Có các chuẩn bổ sung ITU-T H.323 v3 và H.450
- Hỗ trợ truyền và cuộc gọi chờ
- Định tuyến các cuộc gọi đến và đi theo chuẩn SIP và H.323 P2P
- Triển khai trong mạng hỗn hợp gồm các cuộc gọi SIP, Gatekeeper và P2P
- Hỗ trợ đăng ký trên Server
- Chuyển fax SIP/H.323 T.38
- Chuyển các cuộc gọi VoIP tới VoIP, SIP tới H.323, SIP tới SIP, H.323 tới PSTN và công trunk
- Truyền trong và ngoài DTMF
- Chức năng điều khiển cuộc gọi IVR đối với PSTN / VoIP
- Hỗ trợ ghi lại thông tin cuộc gọi CDR (Call Detail Record)
- Xác thực người dùng các ứng dụng VoIP khác nhau

<b>Model</b>	<b>VIP-2400</b>
<b>Ports</b>	
LAN	2 x 10/100Base-T Ethernet ports
Voice	4 x E1 / T1
<b>Protocol and standards</b>	
Call Signaling Control	SIP 2.0 RFC2543/(RFC3261, ITUT H.323 v3 and H.450 compliance
Voice codec	G.711A/μ-law, G.723.1 (5.3k/6.3k), G.729A
Fax support	Automatic voice / FAX detection
	H.323 / SIP T.38 fax relay
	ECM Support
	T.38 during fast connect
<b>VoIP features</b>	
Voice processing	VAD (Voice Activity Detection)
	CNG (Comfort Noise Generation)
	G.168 echo cancellation
	Configurable audio payload size
	Adaptive Jitter Buffer
	Silence suppression
	Gain control
Voice traffic conversion	H.323 to H.323 Call
	H.323 to PSTN Call
	H.323 to SIP Call
	PSTN to H.323 Call
	PSTN to PSTN Call
	PSTN to SIP Call
	SIP to H.323 Call
	SIP to PSTN Call
	SIP to SIP Call
	VoIP to VoIP RTP un-Routed
	VoIP to VoIP RTP Routed
DTMF Transmission	Transparent
	H.245 signal/ Alphanumeric
	H.323 Q.931 UUI
	RFC 2833
	SIP INFO
IVR / Call-flow controller	Built-in IVR system
	Web-based GUI Drag and Drop interface
	Full control of call behavior
	PSTN / VoIP IVR functions
	Support time duration and balance play back
	Powerful call information branch
	Collected information validation

>>> Thông số kỹ thuật

Management	
Interface	Console port, TELNET and Web Browser (HTTP/HTTPs)
	Front panel LCD display
	User account management
	Real time monitor
	Password Security
	SNMP v2 Trap support
AAA(Authentication / Authorization / Accounting)	Built-in AAA mechanism, and external RADIUS AAA support
Environmental	
Environmental	Temperature: 0~50 degree C (operating)
	Humidity: 5 to 95% (non-condensing)
Emission	EMI: FCC part 15, CE / PTT: FCC part 68

>>> Thông tin đặt hàng

**VIP-2400**

4-Port E1 / T1 Trunk Gateway (1 x E1 / T1)



**PLANET Technology Corporation**

11F, No. 96, Min Chuan Road, Hsin Tien, Taipei,  
Taiwan.  
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528  
Email : [support@netcom.com.vn](mailto:support@netcom.com.vn)  
Web site : <http://www.planet.com.vn>  
VoIP Gateway: [vip.planet.com.tw](http://vip.planet.com.tw)

Planet reserves the right to change specifications without prior notice.  
All brand names and trademarks are property of their respective owners.  
Copyright © 2005 PLANET Technology Corp. All rights reserved

**FC CE**

**C- VIP-2400 09- 08**

